
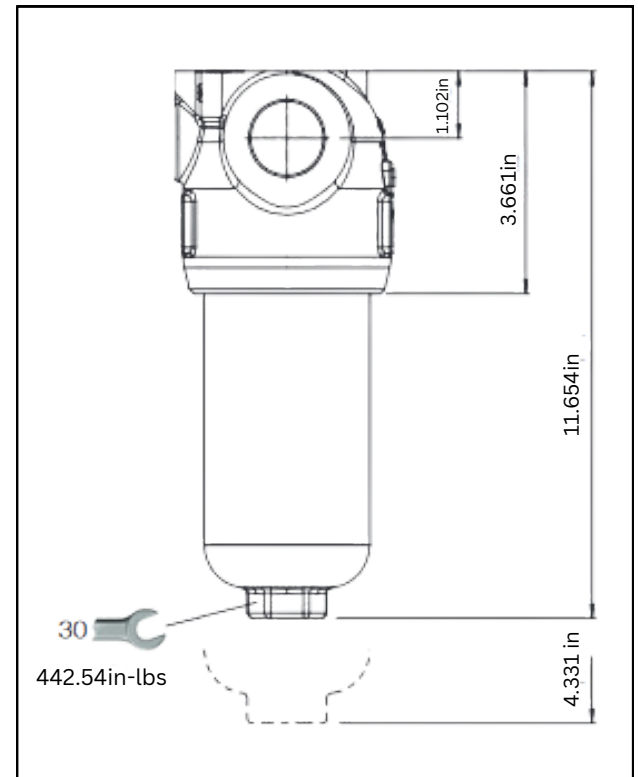


Filter Specifications:

- **Filter Housing Length With Indicator:**
12.83in
- **Clearance to Change Element:**
4.33in
- **F+ microfibre filter element:** (included with filter)
($\beta_{x(c)} > 1000$ - ISO 16889)
12 μm (c)
- **Port Size:** SAE J1926-1 Threaded:
SAE-16
- **By-Pass valve:**
By-pass valve with cracking pressure 88 PSI
- **Differential clogging indicator:**
Electrical indicator w/LED, 73PSI \pm 10%

Total Δp = filter head Δp + filter element Δp

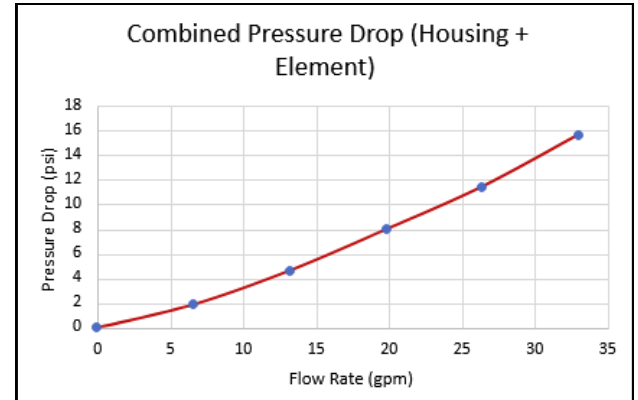

Replacement Elements:

(BX=1000)

- BFR30FB01HSP- 5 μm ***
- BFR60FB01HSP- 7 μm**
- BFR01FB01HSP- 12 μm ***
- BFR02FB01HSP- 22 μm**

*= normally stocked

Complete Assembly is made of:
-Body: BFPR24NSB01SPF
-Visual Indicator: BF01L50EDIC
-Element: BFR01FB01HSP